


4-Ch Hybrid Digital Video Recorder



Efficient Solution for Combining IP and Analog Cameras

PLANET HDVR-430 is a hybrid DVR recorder which is able to record video and data from traditional analog, AHD (Analog High Definition) and network IP security cameras. The advantage of a hybrid DVR recorder is that it lets you use currently installed analog security equipment along with newer network IP technology. This enables you to upgrade your surveillance system to IP equipment at your own pace, according to your budget. The HDVR-430 is the 4-channel, embedded system with HDMI local display and features recording, live view, playback and backup functions, etc. With easy-to-remember DDNS feature, the HDVR can be placed either in LAN or WAN for easy installation. Besides, designed for various surveillance applications via RS485 interface, the HDVR is capable of controlling most types of protocols. For the purpose of general monitoring, the HDVR-430 offers app viewer, Web browser and CMS (Central Management Software) for multi-platform remote access, thus making it an ideal solution for various applications, such as retail stores, communities, SMBs, supermarkets, restaurants and schools.

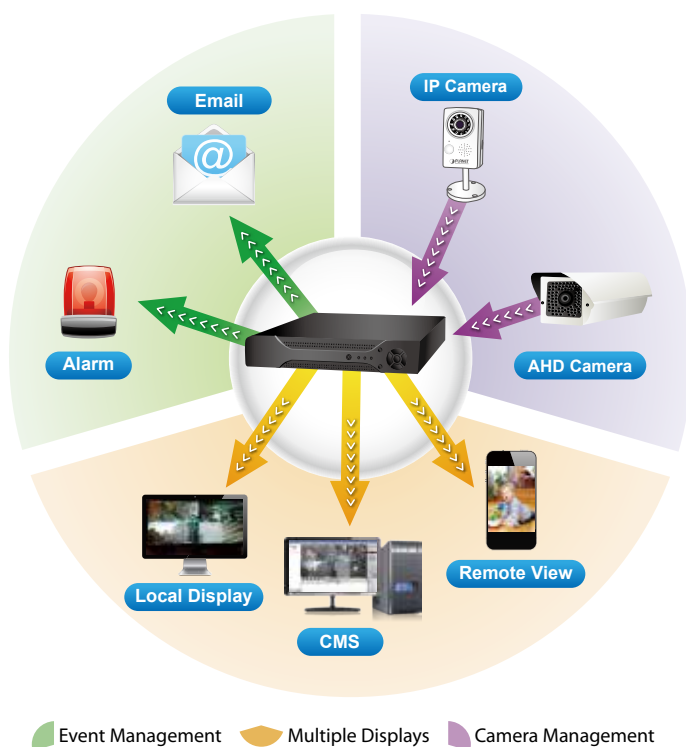

Hardware

- Embedded, highly-reliable standalone HDVR
- Supports 4-ch BNC connectors
- Supports dual local displays (VGA and HDMI)
- Supports 3.5" SATA x 1 HDD
- Supports RS485 for PTZ control

Video / Audio

- Supports H.264 compression
- Video resolution up to AHD-M (1280 x 720)
- Supports hybrid mode for the combination of IP, traditional analog and AHD cameras
- 2-way audio support with enhanced audio quality

Video Recording / Backup

- Simultaneous recording and live video streams
- Manual or scheduled recording of 4 cameras simultaneously
- Video recycling function records suspicious events 24/7
- Exports recorded video file in AVI format to USB device
- Instant Event Notification

Network Service

- Easy access with PLANET Dynamic DNS and built-in NTP Server
- Supports PPPoE, DHCP and manual settings

Easy Installation & Management

- ONVIF compliant for interoperability
- Supports multiple languages
- Automatically discovered by management software
- Web-based and management utility for easy configuration
- Up to 256 channels with the central management software
- Supports two USB2.0 ports for mouse control and backup
- Supports mobile phone remote viewer, Web UI and CMS

Hybrid Integration


The HDVR-430 allows each of its 4 channels to be connected to either an analog camera or an IP camera. If you already have analog cameras and want to add on a few IP cameras, the HDVR-430 is definitely your ideal choice. In addition, as the HDVR-430 complies with ONVIF, it is interoperable with any third-party IP cameras, thus omitting compatibility issue and allowing you to add more cameras.

Hybrid Integrated IP and AHD System



High Resolution Local Display

The HDVR-430 provides HDMI and VGA video output interfaces for dual local displays, which can be connected to HDMI monitor or VGA monitor for live view monitoring with video output of maximum 1280 x 720 resolutions. Due to local display, it can eliminate the need for a separate PC to view video from the unit. Besides, it also can be operated with the USB mouse to configure and monitor all the system easily.

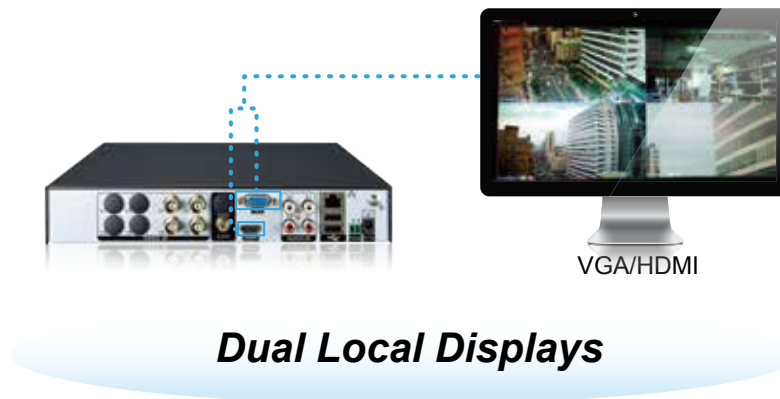


Dual Local Displays

Real-time Remote Monitoring

Video from the HDVR system can be accessed with Web browsers and mobile devices. With remote monitoring, you can view live and recorded video, allowing for easier monitoring of your video deployments, and the ability to react quickly to alarms and events.

Real-time, Remote Monitoring

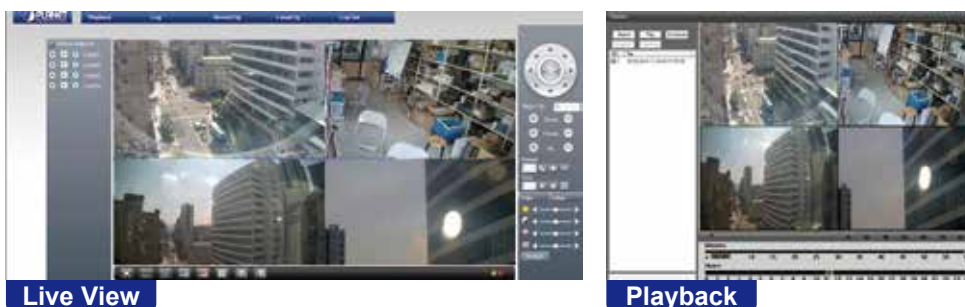

Central Management System (CMS)

Not just for small scale applications such as retail stores and SMBs, the HDVR system is expandable for multi-site management with the bundled CMS software. The CMS software is able to manage up to 256 channels of cameras simultaneously. With friendly graphic interface, users can control any cameras or HDVRs easily and make a quick response when event is triggered. With CMS support, users are able to make surveillance more efficient.



Applications


Advanced Event Management

The HDVR-430 is equipped with a smart, alarm-triggering mechanism and supports various alerts and abnormal events. When it comes to a critical event, having a smart and responsive event management in place is essential for video surveillance system. This feature greatly strengthens the security and management efficiency of PLANET HDVR system.



Perfect for Indoor Surveillance Applications

PLANET HDVR system can be controlled and monitored both in the local LAN and the remote site via Internet. Users can also login from their mobile phones to check the monitoring screen anywhere, anytime. It is especially perfect for indoor surveillance in such places as retail stores, communities, restaurants, etc.

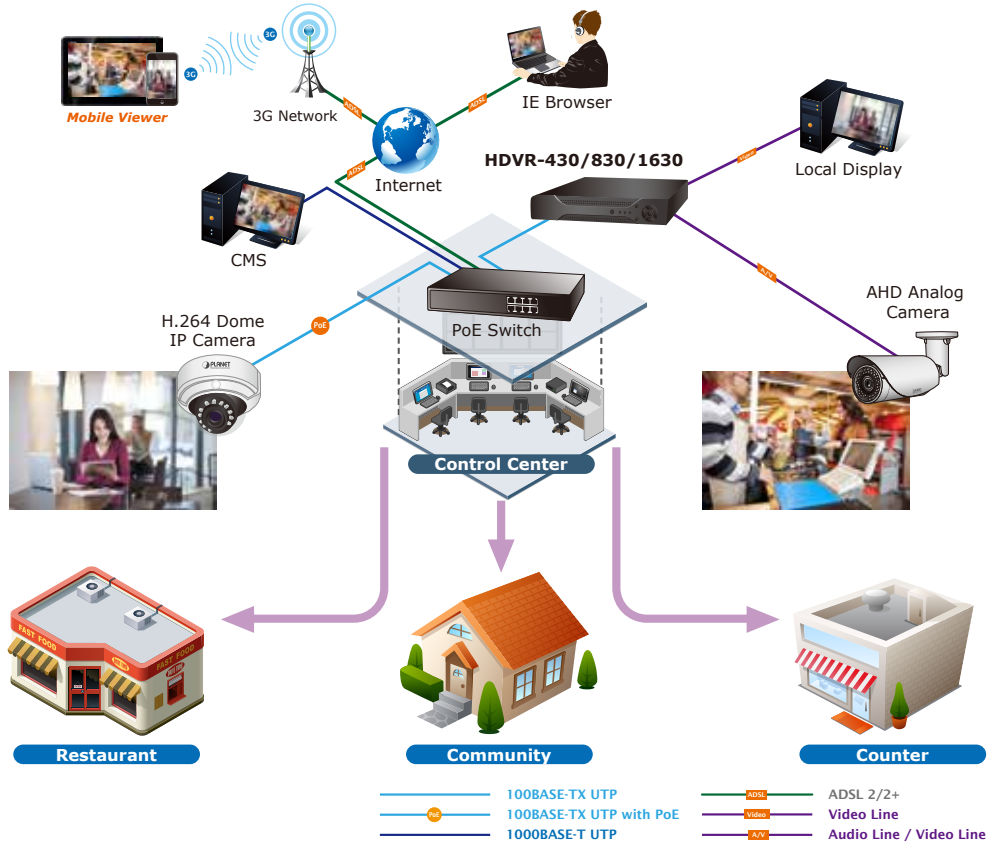

Specifications

Product	HDVR-430
Hardware	
Ethernet	1 x RJ45, 10/100BASE-TX
BNC Interface	4
USB Interface	2 x USB 2.0 for backup device and mouse
Video Interface	VGA/HDMI video interface
Audio Interface	4 x audio-in, 1 x audio-out
Storage Device	1 x 3.5" SATA hard disk connector (max. 4TB)
LED	Power, Record, Alarm
Button	Menu, ESC, Direction & Enter
Camera	
Max. Channels	4-channel cameras
Additional Camera	Manual/Smart Camera Search
Video	
Video System	PAL (625line, 50f/s); NTSC (525line, 60f/s)
Compression	H.264
Resolution	IP camera: 1080p / 720p Analog camera: AHD-M (720p), AHD-L (960H), 960H, D1, HD1, CIF
Encode Capacity	4-ch AHD, 4-ch 960H, 4-ch D1
Decode Capacity	1-ch AHD, 4-ch 960H, 4-ch D1
Hybrid mode	Analog cameras: 4-ch AHD-M (720p), 4-ch AHD-L (960H) Analog cameras & IP cameras: 2-ch AHD-M (720p), 2-ch 720p IP cameras: 8-ch 1080p, 8-ch 720p, 4-ch 1080p, 4-ch 720p, 1-ch 1080p, 2-ch 720p
Motion Detection	Zones: 192 (16 x 12) detection zones Sensitivity: multi-level sensitivity (only local channels)
Audio	
Audio Type	2-way
Audio Format	G.711A

Live view	
Display Division	1/4
Snapshot	Video snapshot in JPEG format
Playback	
Record	Manual, Alarm, Motion Detection, Timing
Local Playback	1~4ch simultaneous playback; Supports up to 4-channel playback (1ch real time)
Play Method	Play, Pause, Stop, Slow, Fast, Prev. Frame, Next Frame Search by time, calendar, event, channel
Download	Back up file to specific local HDD partition
Monitor	
Display Quality	1920 x 1080, 1440 x 900, 1280 x 1024, 1280 x 720, 1024 x 768
Network and Configuration	
Network Service	TCP, UDP, HTTP, DHCP, DNS, DDNS, RTSP, NTP, UPnP, FTP, SMTP
Security	Password protection, IP address filtering
Triggers and Event	
Event Type	<p>System Events</p> <ul style="list-style-type: none"> ■ No storage ■ Storage Error ■ Storage No Space ■ Net Disconnection ■ IP Conflict <p>Camera Events</p> <ul style="list-style-type: none"> ■ Motion Detection, Video Blind, Video Loss, DI
Event Action	<ul style="list-style-type: none"> ■ Show Message ■ Buzzer ■ Mobile Reported ■ Send e-mail ■ FTP Upload ■ Write Log
Management	
Remote Session	5
Privileges	Live View, Playback, System Configurations, Camera Configurations, Recording Configuration, Event Configuration, Maintenance
User Interface	<ul style="list-style-type: none"> ■ Graphic local user interface (Operated by mouse) ■ Web browser (IE) ■ CMS utility
Log Type	All, System, Config, Storage, Alarm Event, Week Day, Account, Playback
Software Utility	Search utility, CMS, App
Environment	
Power Requirement	12V DC, 2A
Consumption	15W (without HDD)
Operating Temperature	0~55 degrees C
Storage Temperature	0~60 degrees C
Humidity	10~90% (non-condensing)
Weight	1.7 kg
Dimensions (W x D x H)	255 x 225 x 45 mm

Ordering Information

HDVR-430	4-Ch Hybrid Digital Video Recorder
----------	------------------------------------

Related Products

CAM-IR138	15-meter Infrared Camera
CAM-IR338	30-meter Infrared Camera
CAM-IR560V	50-meter Infrared Vari-focal Camera
ICA-3150	720P IR Bullet PoE IP Camera
ICA-4150	720P IR Dome PoE IP Camera
ICA-W7100	720P Wireless IR PT IP Camera
HDVR-830	8-Channel Hybrid Digital Video Recorder
HDVR-1630	16-Channel Hybrid Digital Video Recorder